

Speedseal[®] MX

Features

- Rotary heat seal
- Continuous motion of the conveying system
- Seal up to 27 packages/minute
- Adjustable discharge shelf with Lexan[®] safety guard
- Constructed of easy-to-clean stainless steel and aluminum
- Removable tray carriers constructed of aluminum
- For use in ambient temperature (50°F or above)
- Lockable casters



Benefits

- Adjustable speed reduces food splash
- Simple to operate; easy to cross-train employees
- Factory-set heat roller temperature creates optimal seals
- Easy roll in and out for production line flexibility
- Supported by a nationwide service organization

Speedseal[®] MX

Specifications

Maximum Tray Capacity

- 8.7" W x 10" L x 3.25" D
- Tray sealing lengths range from 3.5" to 10", in 1/2" increments

Heat Seal Temperature Range

- Factory set to approximately 350°F

Machine Dimensions



- 27" W x 83" L x 56" H
- Infeed length approximately 28"
- Maximum film roll diameter 9"

Electric Options

- 120 VAC, 13 Amps, 60Hz, 1 Phase
- 200-240 VAC, 10 AMPS, 50-60 Hz, 1 phase

Weight

- Net: 340 lbs.
- Shipping: 450 lbs.

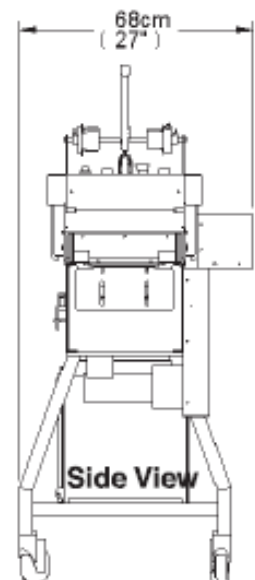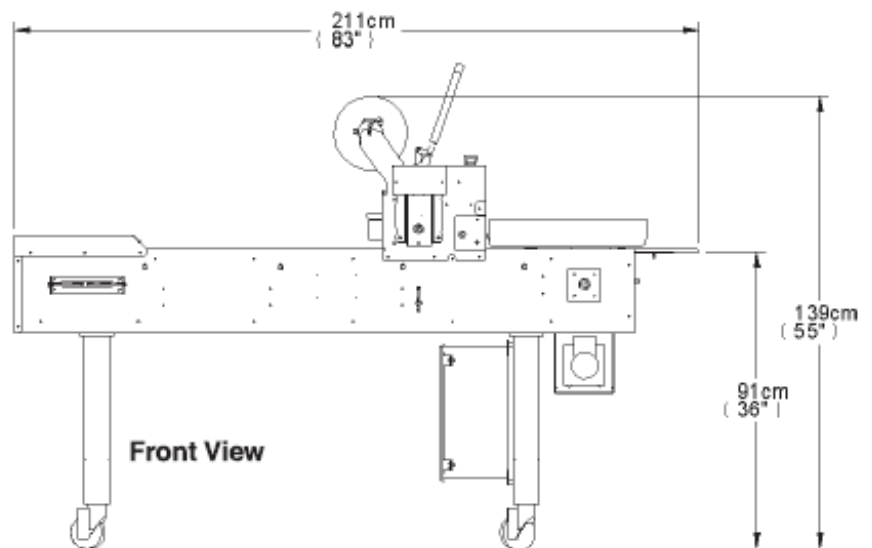

Made in the USA