



Model 1908-029

Speedseal[®] MX-2/12

Features

- Intermittent-motion sealing
- Seal up to 27 packages/minute
- Adjustable speed
- Uses straight-slit film rolls
- Adjustable discharge shelf with Lexan[®] safety guard
- Constructed of easy-to-clean stainless steel and anodized aluminum
- Removable tray carriers constructed of aluminum
- Lockable casters

Benefits

- Adjustable speed reduces food splash
- Simple to operate; easy to cross-train employees
- Factory-set heat platen temperature creates optimal seals
- Easy roll in and out for production line flexibility
- Supported by a nationwide service organization

Speedseal[®] MX-2/12

Specifications

Maximum Tray Capacity

- 8.7" W x 6.5" L x 3.25" D
- Seal trays with lids at 3.5" or 7" L

Heat Seal Temperature Range

- Factory set to approximately 275°F

Machine Dimensions


- 22.5" W x 143" L x 47.25" H

Electrics

- 120 VAC (USA), 6 AMPS, Single Phase, 60 Hz (USA)

Weight

- Net (estimated): 560 lbs.
- Shipping (estimated): 680 lbs.

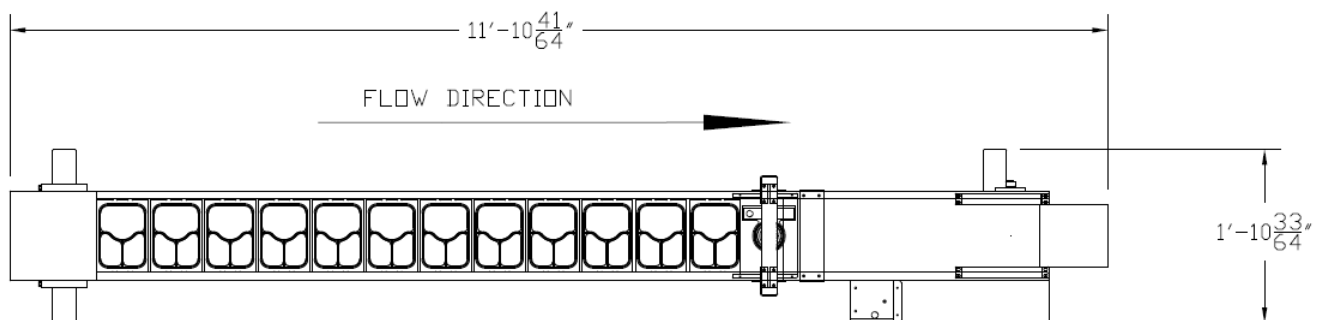

Made in the USA